



Floor Trough

Straight Length, Box edge & Square corners
Normal 90mm basket waste in centre waste

Stainless steel floor troughs are perfect for collecting run off from commercial kitchen floors and public use areas.

The troughs are designed for ease of installation in the floor during construction and come complete with fixing brackets and furnco slip-in waste coupling.

They are designed to stand the torture of heavy kitchen traffic and come with matched grates that can be selected according to load class A, B, C or D, slip resistance and aperture size for protecting high heels.

The troughs meet Australian Standards and are made in Australia by Stoddart Manufacturing who has 50 years experience in stainless steel fabrication.

The Stainless Floor Trough range consists of; Straight troughs, U Shape troughs, L Shape troughs and T Shape troughs with either Square or Radius corners in the base of the troughs and single or multiple waste outlet positions that include either 90mm or 140mm waste baskets.

Please refer to the addition technical data sheets for grate selection information.

Models:

SPFT.SANC.1.W.L


Code Breakdown

SPFT	= Standard Product Floor Trough
S	= Straight floor trough
A	= Boxed edge & square corners
N	= normal basket waste outlet 90mm diameter
C	= Centre Waste
1	= type 1 grate (5mm wire spacing with 12mm support bars at 25mm centres)
W	= Grate width (mm) std 100,150, 200, 250
L	= Total grated length (mm) Std 1200, 1500, 1800, 2000, 2100, 2400, 2700, 3000

Note: For overall trough size, add 46mm to grate width and length.

To specify or order

e.g. SPFT.SANC.1.200.1800

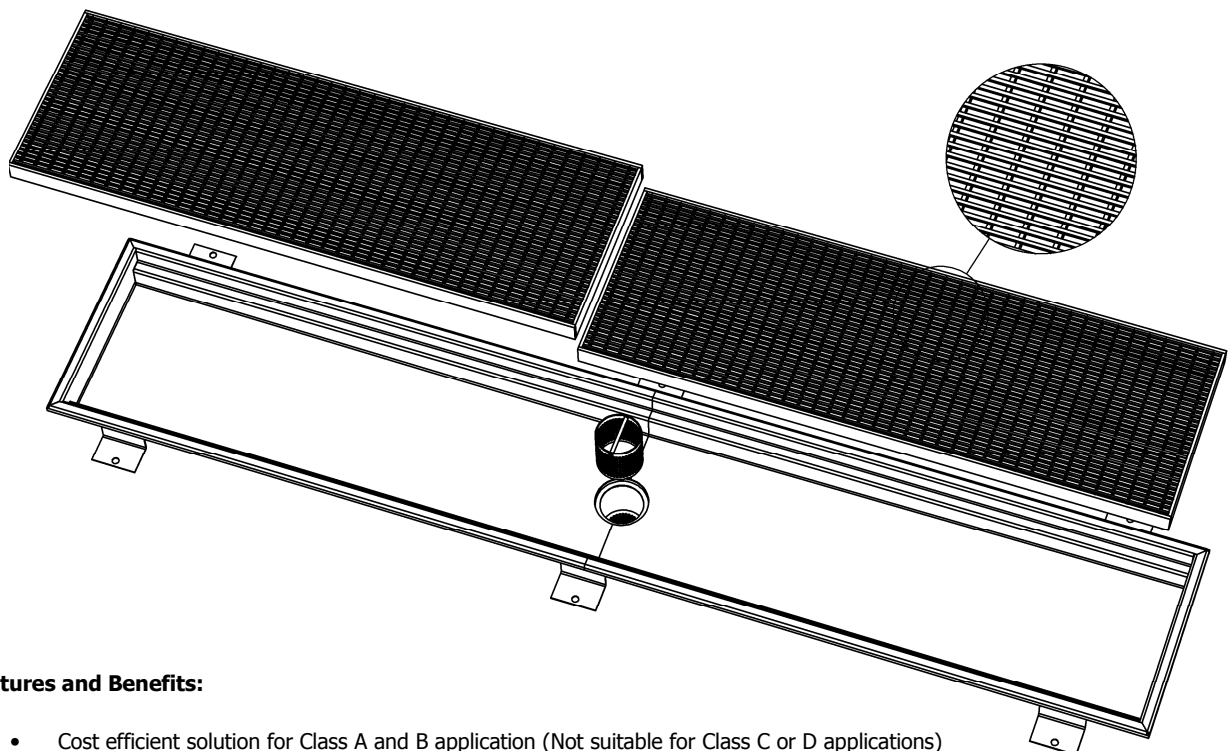

Features and Benefits:

- Cost efficient solution for Class A and B application (Not suitable for Class C or D applications)
- Constructed from 1.2 mm thick, 304 Stainless Steel, fully welded and finished to a No.4 grade polish.
- The square top edge profile is designed to be used when concrete is to be poured in situ around the trough.
- The use of large (1:100) fall in the base of trough ensures complete draining.
- Angle Brackets to allow fixing to floor prior to concrete pouring.
- Small aperture non slip high strength grating for heavy foot and trolley traffic.
- Removable stainless steel perforated basket with solid handle fitted to recess in trough floor.
- 90mm diameter outlet for connection to standard drainage pipe.
- Stainless Steel 304 No 4 1.2mm thick welded and polished construction.

Due to continuous product research and development, the information contained herein is subject to change without notification.

