



## Floor Trough

Straight Length, Box edge & Square corners  
Normal 90mm basket waste in centre waste

Stainless steel floor troughs are perfect for collecting run off from commercial kitchen floors and public use areas.

The troughs are designed for ease of installation in the floor during construction and come complete with fixing brackets and furnco slip-in waste coupling.

They are designed to stand the torture of heavy kitchen traffic and come with matched grates that can be selected according to load class A, B, C or D, slip resistance and aperture size for protecting high heels.

The troughs meet Australian Standards and are made in Australia by Stoddart Manufacturing who has 50 years experience in stainless steel fabrication.

The Stainless Floor Trough range consists of; Straight troughs, U Shape troughs, L Shape troughs and T Shape troughs with either Square or Radius corners in the base of the troughs and single or multiple waste outlet positions that include either 90mm or 140mm waste baskets.

Please refer to the addition technical data sheets for grate selection information.

### Models:


#### SPFT.SANC.3.W.L

Code Breakdown

SPFT	= Standard Product Floor Trough
S	= Straight floor trough
A	= Boxed top edge & Square corners
N	= Normal basket waste outlet 90mm diameter
C	= Centre waste
3	= Type 3 grate (5mm wire spacing with 25mm x3mm support bars at 25mm spacing)
W	= Grate Width (mm) std 150, 200, 250, 300
L	= Total grated length (mm) Std 900, 1200, 1500, 1800, 2100, 2400, 2700, 3000

Note: For overall size of trough, add 46mm to grated width and length.

To specify or order  
e.g. SPFT.SANC.3.300.1800

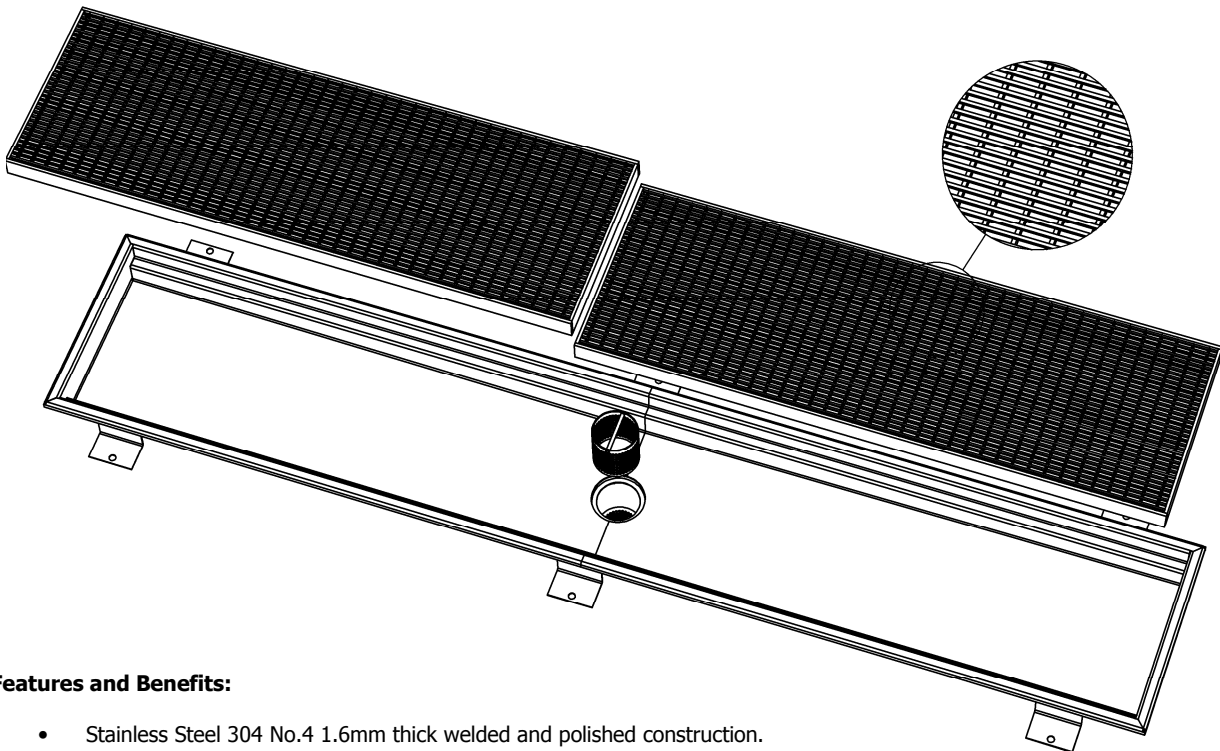

### Features and Benefits:



- Stainless Steel 304 No.4 1.6mm thick welded and polished construction.
- Fall in base of trough of 1:100 to allow complete draining.
- The square top edge profile is designed to be used when concrete is to be poured in situ around the trough.
- The underside of the square edge is filled with epoxy resin to provide solid support for Class D applications
- Angle Brackets to allow fixing to floor prior to concrete pouring
- High Strength grating for carriageways open to commercial vehicles.
- Removable stainless steel perforated basket with solid handle is fitted to recess in trough floor.
- 90mm diameter outlet for connection to standard drainage pipe
- Optional fastening points can be ordered for securing grates into trough (recommended for wider troughs)

Due to continuous product research and development, the information contained herein is subject to change without notification.



# Floor Trough

Straight Length, Box edge & Square corners  
Normal 90mm basket waste in centre waste

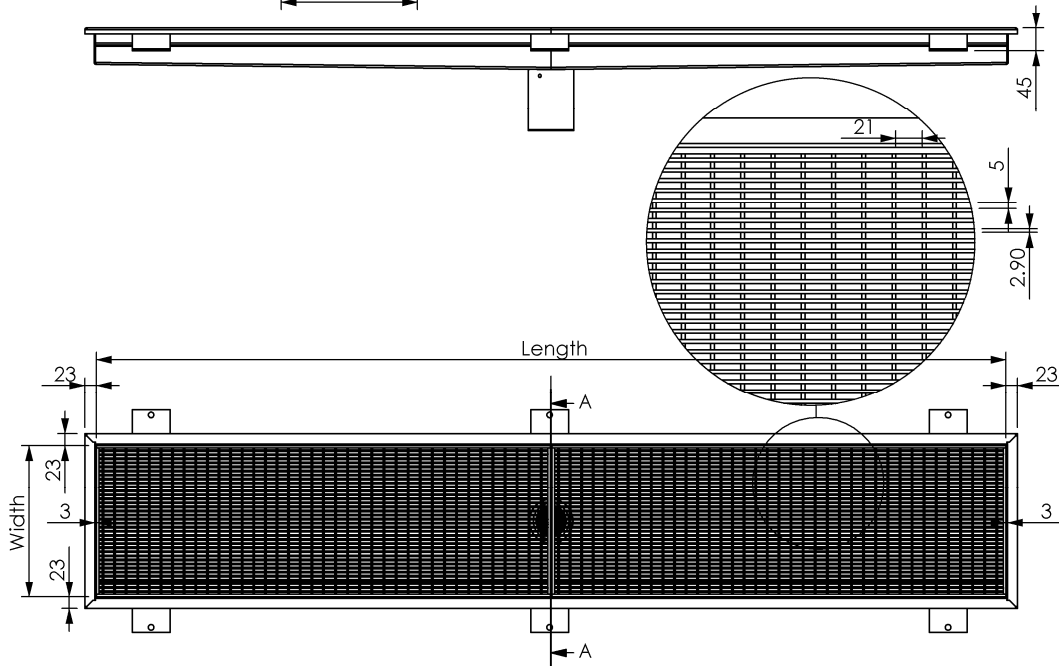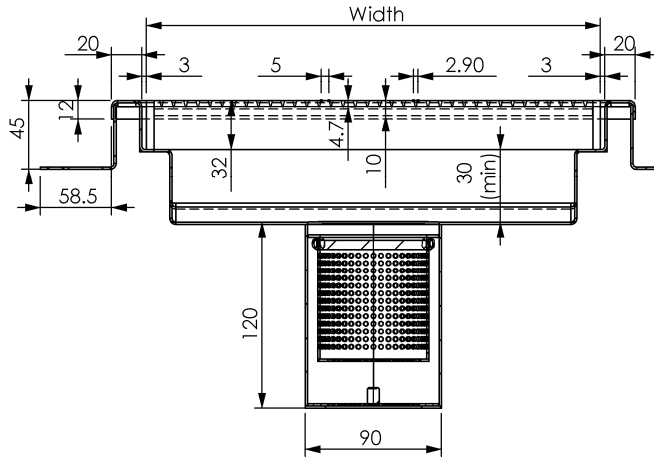

**Models:**

**SPFT.SANC.3.W.L**

Code Breakdown

SPFT = Standard Product Floor Trough

S = Straight floor trough

A = Boxed top edge & Square corners

N = Normal basket waste outlet 90mm diameter

C = Centre waste

3 = Type 3 grate (10mm wire spacing with 25mm x3mm support bars at 25mm spacing)

W = Grate Width (mm) std 150, 200, 250, 300

L = Total grated length (mm) Std 1200, 1500, 1800, 2100, 2400, 2700, 3000

Note: For overall size of trough, add 46mm to grated width and length.

To specify or order

e.g. SPFT.SANC.3.300.1800

Total Grate Length	Grate Combination	Overall Trough Length	O/A Depth Shallow End	O/A Depth Outlet End	Weight kg
600	1 x 600 mm	646 mm	62 mm	65 mm	
900	1 x 900 mm	946 mm	62 mm	66.5 mm	
1200	1 x 1200 mm	1246 mm	62 mm	68 mm	
1500	1 x 600 mm + 1 x 900 mm	1546 mm	62 mm	69.5 mm	
1800	2 x 900 mm	1846 mm	62 mm	71 mm	
2100	1 x 900 mm + 1 x 1200 mm	2146 mm	62 mm	72.5 mm	
2400	2 x 1200 mm	2446 mm	62 mm	74 mm	
2700	3 x 900 mm	2746 mm	62 mm	75.5 mm	
3000	2 x 900 mm + 1 x 1200 mm	3000 mm	62 mm	77 mm	
3300	1 x 900 mm + 2 x 1200 mm	3300 mm	62 mm	78.5 mm	
3600	3 x 1200 mm	3600 mm	62 mm	80 mm	
3900	3 x 900 mm + 1 x 1200 mm	3900 mm	62 mm	81.5 mm	

Due to continuous product research and development, the information contained herein is subject to change without notification.