

Stainless Toilet Pan Wall Faced, Type 3

Toilets made in Australia from stainless steel by Stoddart Manufacturing have the best water efficient dual flush rating (certified by WELS for 4.5 litre full flush and 3 litre half flush).

The Stoddart Toilet reduces maintenance costs, water usage costs and is the right choice for use in all high security prisons, detention centres, police stations, hospitals and public amenities.

Vandal resistant, fully welded stainless steel construction provides superior strength, superior hygiene and long service life.

The toilet seat is hydraulically formed to create a safe, strong, comfortable contoured and self draining profile.

The Standard option has a secured side access cover (shown) for police stations and public amenities. Flush fitted access panels are available on left, right or both sides. (note: Left Side Access is standard if not specified)

Models:

SPPL.TP.WF3.xx

Code Breakdown;

SPPL

Standard Product Plumbing

TP.WF3

Toilet Pan - Wall Faced Type 3

xx

Blank - Standard specification
D - Disabled height
HD - Heavy Duty specification
LSA - Left Side Access panel
RSA - Right Side Access panel
BSA - Both Side Access panels


Examples;

SPPL.TP.WF3
SPPL.TP.WF3.D
SPPL.TP.WF3.HD
SPPL.TP.WF3.D.HD
SPPL.TP.WF3.LSA
SPPL.TP.WF3.D.LSA
SPPL.TP.WF3.D.LSA.HD



Model:

SPPL.TP.WF3.D.LSA

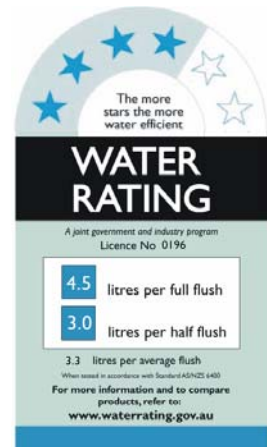

Rating achieved with
Sanitron Dual Flush
Electronic Valve

Features and Benefits:

- Standard unit has stainless steel shroud and formed seat for superior hygiene & strength.
- Optional heavy duty (HD) specification has 3mm toilet seat & 2mm thick shrouds.
- Plumbing & fixing points are concealed for security and vandal resistance.
- Access to plumbing can be either via side access panels or through a rear service duct.
- Toilet Pan Seat has an anti-contraband flushing rim for effective cell inspection.
- Seat has smooth hydraulically formed radius to both outer and inner edges for safety and comfort and has a self draining seat surface for improved hygiene.
- All external corners are rounded with a smooth radius for user safety.
- These toilets can be installed with either a flush valve or a cistern (order separately).



Due to continuous product research and development, the information contained herein is subject to change without notification.

Stainless Toilet Pan Wall Faced, Type 3

Specifications:

Construction:

Standard Specification

Toilet bowl – Highly polished 304 stainless steel
Toilet Seat Body & Pan shroud – 304 stainless steel, No 4 satin finish

Optional Heavy Duty Specification

Toilet bowl – Highly polished 304 stainless steel
Toilet Seat - 3.0mm 304 stainless steel, No 4 finish
Body and Pan shroud – 2.0mm stainless steel, No 4
Watermarked and WELS approved 4.5 litre full flush / 3 litre half flush.

Ordered separately.

- Electronic Flush valve requires 20mm mains connection, water pressure regulated between 250kpa and 500kpa and a flow rate between 1.2 and 1.5 litres per second at the valve face. The 'RAG' must be mounted >300mm above seat.
- B) Cistern Installation should be minimum 1150mm to top of cistern

Flushing:

Pan Inlet

Connection:

60mm i.d. stainless steel inlet.
Supplied with key-seal connector for 40mm PVC feed pipe from Cistern or RAG.

Pan Outlet

Connection:

P trap is standard. (Optional p-S adaptor can be ordered separately).
95mm o.d. diameter stainless steel spigot with rubber coupling included to suit 100mm PVC or copper sewer pipe.

Unit Fixing:

The unit is designed to be fixed to the rear wall with 4 M12 bolts. A Z-clip is supplied to secure the front of the base to the floor.

Models:

SPPL.TP.WF3.xx

Code Breakdown:

SPPL

Standard Product Plumbing

TP.WF3

Toilet Pan - Wall Faced Type 3





xx

Blank - Standard specification
D - Disabled height
HD - Heavy Duty specification
LSA - Left Side Access panel
RSA - Right Side Access panel
BSA - Both Side Access panels

Examples:

SPPL.TP.WF3
SPPL.TP.WF3.D
SPPL.TP.WF3.HD
SPPL.TP.WF3.D.HD
SPPL.TP.WF3.LSA
SPPL.TP.WF3.D.LSA
SPPL.TP.WF3.D.LSA.HD

Note: Rear Access units are designed for use with a service duct. The P trap and flush pipe are accessed through the service duct. The unit has overall length can be reduced to 600mm.

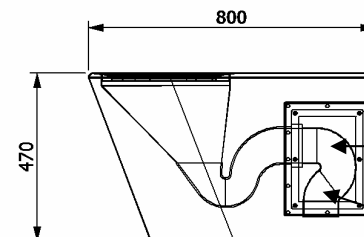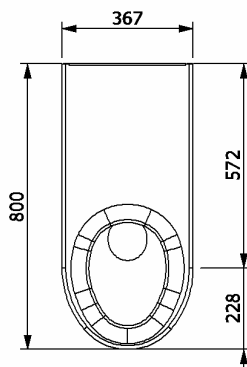

Toilet Seat height
Disabled 460mm min. to FFL
Standard 400mm to FFL
Waste centre line height
Disabled 245mm to FFL
Standard 185mm to FFL
P-S adaptor shown is not standard. It can be ordered separately if required.
Floor waste centre is 160mm from rear wall.

Model : SPPL.TP.WF3.D.RSA
Side Access as illustrated

Due to continuous product research and development, the information contained herein is subject to change without notification.