

Stainless Urinal - Grated

Australia's premier walk-on urinal is the Stoddart Grated Urinal. It is fully welded from hygienic stainless steel and is proven as the preferred commercial urinal.

Models:

UR GTL xxxx Grated, Top water entry, Left waste
UR GTR xxxx Grated, Top water entry, Right waste
UR GRL xxxx Grated, Rear water entry Left waste
UR GRR xxxx Grated, Rear water entry Right waste

Where xxxx is the length of the urinal



Full depth sides for hygiene in use & maintenance.

Concealed vandal resistant sparge housing for full distribution water supply

Compressed fiber cement backing for strength & sound suppression (antidrum)

Fully welded seamless construction of 1.2mm stainless steel 304 grade.

All internal corners are 25mm radius for cleaning ease.

Slip resistance, high strength, hygienic design stainless steel grate is hinged for easy cleaning access.

Integral skid mount feet for ease of installation.

Unit can be set into floor or surface mounted with optional stainless steel kick panel.



Rating was achieved with Sanitron Sensor Flushing Device (purchased separately)

Stainless Urinal - Grated

Specifications


Construction:	Fully welded seamless construction 1.2mm stainless steel 304 grade. Fibre cement reinforced backing. The urinal is manufactured with integral skid feet for ease of installation.										
Flush Pipe Entry:	Top or rear entry inlets. Custom inlet positions can be supplied if required.										
Flush Requirements:	Designed for use with manual or electronic flush Valves (not included).										
Waste Outlet Sizes:	<table border="0"> <thead> <tr> <th>Length of Urinal</th> <th>Waste Size</th> </tr> </thead> <tbody> <tr> <td><1800mm</td> <td>50mm</td> </tr> <tr> <td>1800mm - 2400mm</td> <td>65mm</td> </tr> <tr> <td>2400mm - 3600mm</td> <td>75mm</td> </tr> <tr> <td>>3600mm - 5000mm</td> <td>100mm</td> </tr> </tbody> </table>	Length of Urinal	Waste Size	<1800mm	50mm	1800mm - 2400mm	65mm	2400mm - 3600mm	75mm	>3600mm - 5000mm	100mm
Length of Urinal	Waste Size										
<1800mm	50mm										
1800mm - 2400mm	65mm										
2400mm - 3600mm	75mm										
>3600mm - 5000mm	100mm										
Waste Position:	430mm from rear wall & 190mm from side wall.										
Waste Outlet Connection:	Stainless steel spigot with rubber cap Included to suit 100mm PVC or Copper sewer pipe.										
Unit Fixing:	The urinal is designed to be recessed into the floor 165mm. Alternatively, the urinal can be installed above floor level using an optional stainless steel kick panel.										

Models:

UR GTL xxxx	Top water entry, Left waste
UR GTR xxxx	Top water entry, Right waste
UR GRL xxxx	Rear water entry Left waste
UR GRR xxxx	Rear water entry Right waste

Where xxxx is the length of the urinal

0900	=	0900mm long
1200	=	1200mm long
1500	=	1500mm long
1800	=	1800mm long
2100	=	2100mm long
2400	=	2400mm long
2700	=	2700mm long
3000	=	3000mm long
3300	=	3300mm long
3600	=	3600mm long
3900	=	3900mm long
4200	=	4200mm long
4500	=	4500mm long
4800	=	4800mm long
5100	=	5100mm long
XXXX	=	Custom size.

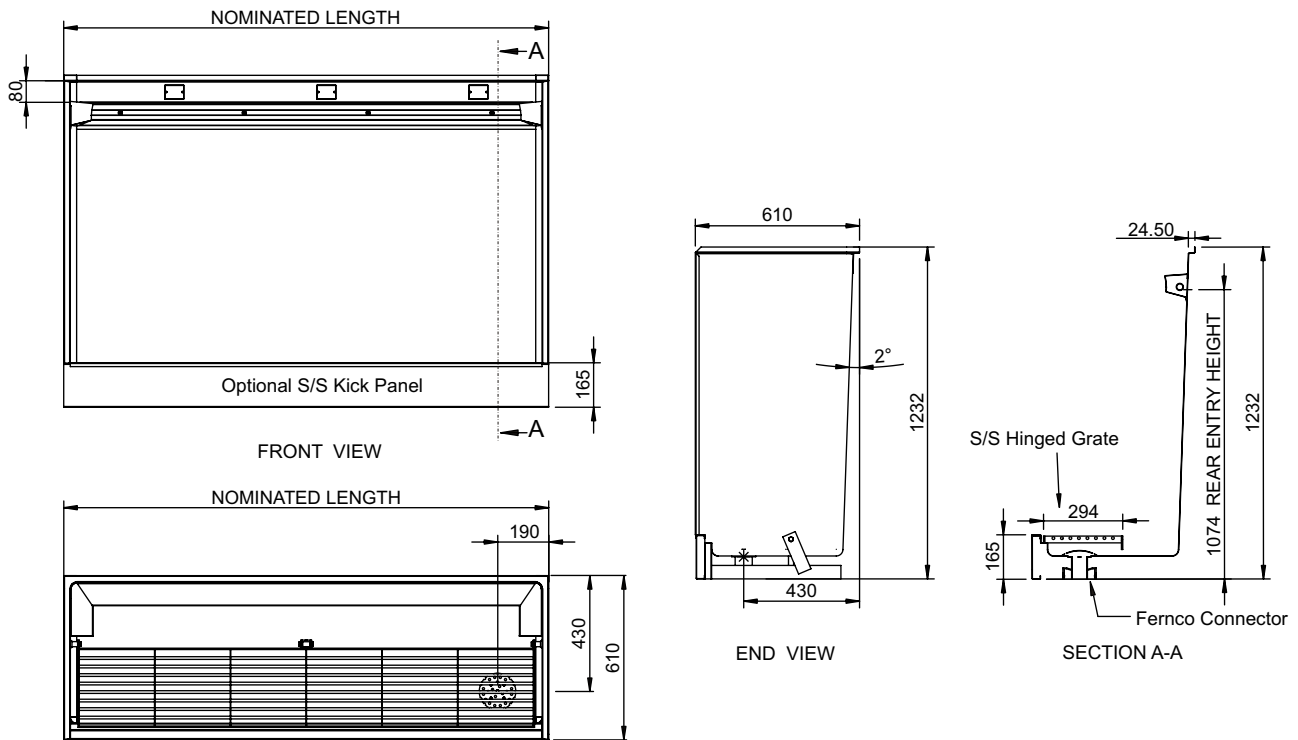

PLAN VIEW

Due to continual product research and development, the information contained herein is subject to change without notification.